



Smart lighting

Alexia

Product sheet




Sustainer 

Sustainer

The smartest public lighting for a better world

Sustainer is an innovative Dutch company at the forefront of the development of smart public lighting and smart city solutions. Our roots lie in the combined expertise of the former Philips/Industria luminaire factory and Dazzletek, specialized in intelligent control systems for public lighting.

At Sustainer, we understand how to design a smart city with solutions that go beyond lighting. Our vision is a future where public lighting goes beyond "just light. Within 20 years, our smart lighting solutions will positively transform city life and provide greater comfort, safety and quality of life for citizens. In this, the street lamp will serve as the central focal point and the environment as the defining factor.

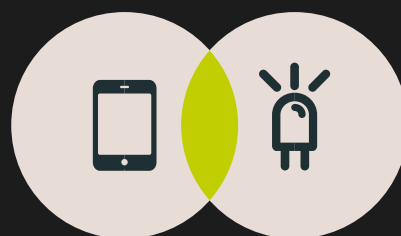

A new generation of LED luminaires


Sustainer is introducing a new generation of advanced LED lighting and luminaires. Developed from our vision of the future, their modular concept and open architecture make them ready now for whatever developments tomorrow will bring. By using LED-technology, sensors and smart software, the energy consumption of Sustainer luminaires is minimized, whilst CO₂ emissions are also reduced.

Luminaire description

Alexia by Sustainer is an all-round, future-proof luminaire. Choosing this luminaire gives you all the current smart-lighting possibilities – and ensures you are prepared for future developments and opportunities. Via an API, this energy-saving LED luminaire can be connected online to any back-office or other system for remote control and monitoring. The luminaire comes equipped with various sensors which make installation easier, reduce maintenance costs and extend service life. And thanks to a unique cassette system, it is also possible to easily extend the luminaire's capabilities in the future. Just add new sensors to the cassette and turn the luminaire into an advanced smart city hub.

Advantages

- Energy efficient LED.
- Standard remote control and monitoring through built-in connectivity.
- Easy to expand with sensors and smart applications by simply replacing the cassette.
- No tooling required for cassette replacement, minimizing replacement times and traffic hindrance.
- Smart applications are inconspicuous by design, preventing any unrest from the public.

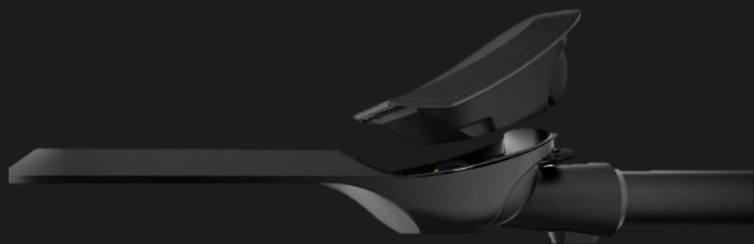

The Sustainer **concept**

Our mission is to transform the public lighting network into a sustainable, future-proof and smart infrastructure.



Our **modular cassette** system makes it possible to use the public lighting infrastructure as locations for **sensors** and communication.


We believe in fully **open** technology to enable the city of the future:

- Open hardware (24V / 230V)
- Open API
- Open standards



The cassette, including electronics, makes **maintenance** and **installation** very easy:

- No tooling required
- Quick cassette replacements
- Automatic error reporting and configuration



Ready for the future, today

Standard functionality



GPS



Mesh RF



Temp IN



Power Meter



Accelerometer



AMB Light

Optional functionality*



Humidity



Camera



Counter



Sound



Gas



Movement



Temp OUT



CO₂



Wifi



Ethernet



2G/3G/4G



NB-IoT



Fiber

**Optional functionalities are custom developed with our clients.*

Back-office connectivity

The luminaire is exceptionally easy to control and manage via any back-office system for public lighting. Use an API to hook it up to your platform for immediate and optimum control.

Luminaire features

- Energy-saving LED technology reduces CO₂ emissions.
- Dimmable.
- Constant light output (CLO) throughout full life of the LEDs (100,000 hours).
- Cassette system supports addition of further sensors in the future.

Luminaire management and maintenance

Thanks to its open architecture, the luminaire can be connected to all back-office systems, using an API. This in turn supports remote monitoring and control that enables you to:

- Configure each luminaire remotely after installation.
- Change configurations remotely.
- Map and monitor your installed base using GPS positioning.
- Monitor the performance of each luminaire remotely.
- Measure the actual energy use of each luminaire.
- Receive errors and defects on luminaire level.

Applications



- Urban areas: city centres, squares, parks and car parks.
- Roads: through roads, roundabouts and cycle paths.
- Residential areas: streets, shopping centres, cycle paths, footpaths, playgrounds and car parks.
- Large sites: industrial parks, ports, airports and stations.

Quality marks

The luminaire is CE, ENEC, RoHS and DEKRA LED Performance certified.




Bike path

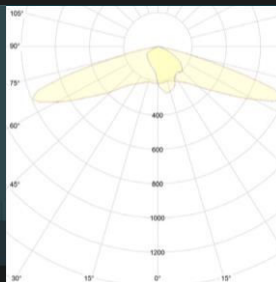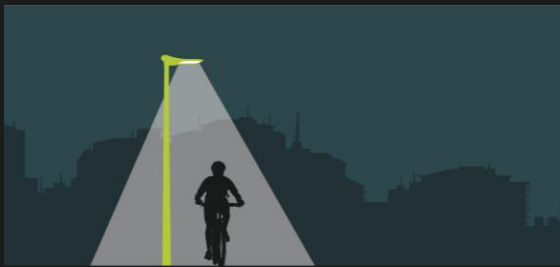



stal 1

Street symmetrical

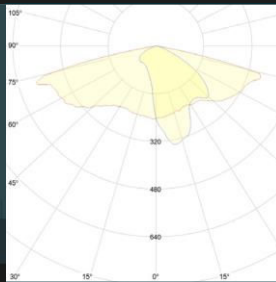



stal 2

Street asymmetrical

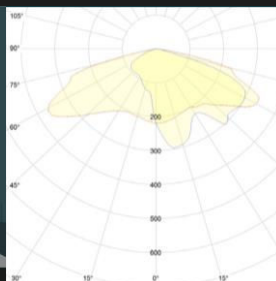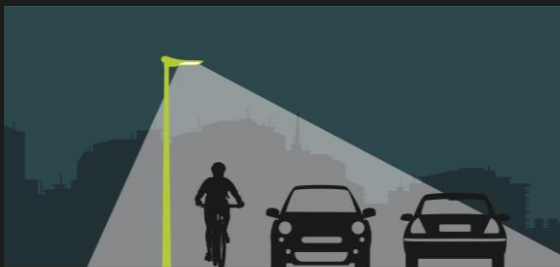



stal 3

Wide street symmetrical / Area¹

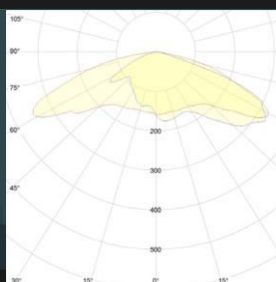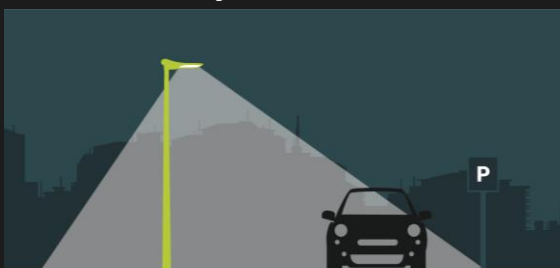

stal 4

Wide street asymmetrical / Area¹

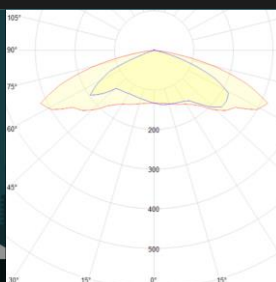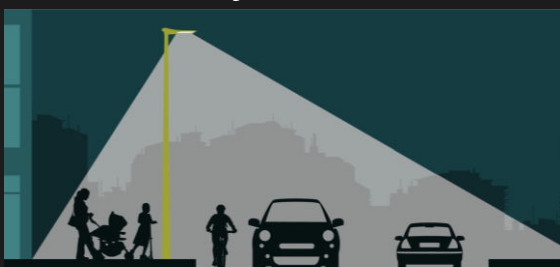

stal 5

¹Optional: shades for reduction of 'backlight'.

Sustainer Alexia

Technical specifications

Lumen/power with standard sensors and RF-module

#LEDs	Driver	Power	Typical luminaire output (lm) – Excl. CLO ^{1,2}				
			2200K	2700K	3000K	4000K	5700K
24 LED	25W	7 – 23W	800 – 2.700	900 – 3.100	1.000 – 3.300	1.000 – 3.400	1.000 – 3.400
	40W	24 – 37W	2.800 – 4.300	3.200 – 5.000	3.400 – 5.300	3.500 – 5.500	3.500 – 5.500
	60W	38 – 54W	4.400 – 6.200	5.100 – 7.400	5.400 – 7.700	5.600 – 8.000	5.600 – 8.000
32 LED	90W	55 – 92W	6.300 – 10.600	7.500 – 12.500	7.800 – 13.000	8.100 – 13.600	8.100 – 13.600

LED efficiency Up to 196 lm/W

Maintenance

LED 100.000 hrs L95 @ Ta = 25°C

Driver 100.000 hrs

Lighting Classes (EN 13201)

Conflict areas C0 – C5

Motorway M3 – M6

Residential areas P1 – P7

Color Rendering Index

CRI >70, >80 on request

Mains Voltage

AC 90 .. 305 V ac

Net Frequency 47 .. 63 Hz

Safety Class I or II

Surge Protection

10 kV

LED Driver

Dimmable 5 .. 100% of maximum

Wireless Mesh Communication

Frequency 869.525 MHz +/-30 ppm

Output power 16 dBm

Sensitivity -105 dBm

Baudrate 130 kb/s

RF Range 121 dB

Material

Housing Die-cast aluminum LM6-quality non-corrosive

Guard Ultra clear safety glass, flat or curved

Cassette PC

Color Standard: NOIR2100 or GRIS2150 / Optional: any RAL color

¹Communicated values are subject to tolerances in technology. For example, the initial flux and power consumption of the luminaire are indicative values and valid for 25°C ambient temperature. The real flux output depends on environmental conditions (such as temperature) and may vary with specific configurations. For more information please check www.sustainer.com.

²Bi-color options are also available. Please contact Sustainer for more information.

Specifications may change and should be treated as an indication only. You are welcome to contact us about your needs.

Sustainer Alexia

Technical specifications

Environmental

Operating temperature	-40 .. +55°C
IP rating	IP66
IK rating Housing	IK10

Installation

Spigot diameter	60 or 76 mm
Height	4 .. 12 m
Side entry	-20° .. +10° (in steps of 5°)
Post top	0° .. +30° (in steps of 5°)

Cable

Cable gland	M20
Cable clamping range	6 .. 11 mm

Dimensions

Length (excl. Spigot)	605 mm
Width	300 mm
Height (excl. Spigot)	134 mm
Weight	7.5 kg

Sensors

Power meter

Resolution	0.5 W
Accuracy 1 .. 5 W	0.5W
Accuracy 5 .. 90W	±5.0%

Temperature (for internal temperature)

Measurement range	-25 .. 100°C
Accuracy	±1.0°C

Accelerometer (tilt detection)

Resolution	0.22 degrees
Accuracy	±0.5 degrees

Ambient Light

Measurement range	1 .. 100k lux
-------------------	---------------

GNSS (Location – Position on map)

Signals	GPS, Beidou
Accuracy	CEP50 ≤ 2.5m

Motion sensor

Optionally integrated

Specifications may change and should be treated as an indication only. You are welcome to contact us about your needs.

Contact

info@sustainer.com
+31 (0)85 047 11 75
sustainer.com

Emmen

Kapitein Grantstraat 9
7821 AP Emmen (NL)

Breda

Emmastraat 2A
4811 AG Breda (NL)

Grefrath

Weststraße 12
47929 Grefrath (DE)